

It's the "Swiss Army Knife" of Ceiling Support Boxes!


You asked for more versatility, and we delivered.

Why stock two or more ceiling supports when a single box can be used for all three vertical chimney applications?

That's what you get with the DTP Reduced Clearance Ceiling Support for use with DuraTech Premium insulated chimney.



DTP-RCS shown with standard Square-to-Round Collar

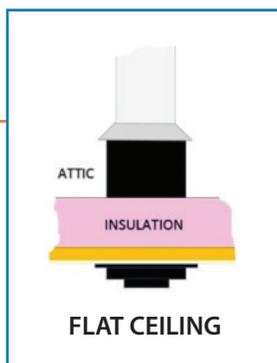

This new box design fulfills plenty of other common requests too. The list of standard features below will quickly make this your go-to ceiling support:

1. Works within Smaller Openings – The DTP-RCS is factory-tested and certified to reduce surrounding clearances-to-combustibles around the box from 2" to just 1". This allows a 6" DTP chimney to be installed within a 10 & 1/8" x 10 & 1/8" opening. Versions of the DTP-RCS are also available for use with 7" and 8" pipe too, although framing dimensions will correspond to diameter.

2. Can act as an Attic Radiation Shield* - When the ceiling penetration is right at the attic, fix the square-to-round collar (included at no extra charge) around the chimney, then push down atop the box to complete the assembly. This eliminates the need for a separate Attic Radiation Shield component. Aside from one less part to worry about, assembly is quicker.

3. Integrated Starter Collar and Built-In Stovepipe Adapter – Like other DTP ceiling supports, the first chimney length simply twist-locks within the support, and the adapter works with both single-wall and double-wall stovepipe. No additional parts are required. Providing the

vapor barrier is secured to the box perimeter, this factory-sealed assembly will help to minimize leakage of air from conditioned spaces (warm) up into unconditioned spaces (cold).

4. Comes with Finish Trim – Our two-piece adjustable trim is pre-painted to match the box. The overlapping ends allow it to work with both flat and pitched ceilings. The end-result is a clean, professional finish.

5. Best of all, the DTP-RCS is insulated! – We include a batt of rockwool insulation with each & every DTP-RCS box we sell. For both new constructions and retrofit installations. Ideal for today's high-efficient homes.

*DTP-RCS Reduced Clearance Ceiling Support has a standard 24" Box Height. A minimum of 3 1/2" must protrude below the ceiling to ensure appropriate clearances for stovepipe. If additional box height is required, a matching 24" Support Box Extension (DTP-SE) is available. With 2" overlap, provides up to 22" in additional height. Be sure to read instructions closely prior to starting an installation.