## **DuraStack PRO Series and DIS Design and Quote Request Submittal Form**

This is an interactive PDF form / type in the shaded area / check mark beside your request(s) / print and save as a project name PDF

PROJECT NAME:

**COMPANY:** 

**CONTACT:** 

TEL:

EMAIL:




EMAIL:	h	LICA	CANADA	QUOT		DEVICION	CAD & DOM		
Please check appropriate		USA	CANADA	QUOTE		REVISION	CAD & BOM		
1 Provide a sketch of y	our sys	tem		7 Barome					
Plan View		Elevation View			YES	N	0		
Include Centerline dime		and Special instru	ctions / obsta	cles					
2 What is the applicati	on?			8 ALL dimens	ional info	ormation to be show	n on sketch		
Boiler		Grease Duct		Show info	Show information on sketch				
Water Heater		Coffee Roaster		Wherever	Wherever possible please provide C/L to C/L dimensions				
GENERATOR		Exhaust							
Air Handler Unit		Particle Contain	ment	9 GENERAT	9 GENERATOR Exhaust Information				
Kiln		Dryer vent		CFM	CFM				
Paint Booth		Other:		Flue Gas T	Flue Gas Temperature				
Fuel Type	Fuel Type			Allowable	Allowable Back-Pressure				
Natural Gas		Oil #2		Outlet Dia	Outlet Diameter				
LP Gas		Other		Termination	Termination Type				
4 Required Appliance I	nforma	ition		Ambient T	emperat	ture			
BTU Input				Pressure D	rop thro	ough Silencer (Muf	fler)		
Boiler HP				Altitude					
Appliance Make				Other Pres	sure Dro	ор			
Model #									
Web Site				10 GENERATO	OR SIZIN	G (information ab	ove required)		
5 Is the application				<del></del>	YES	S			
Positive Pressure		Atmospheric			NO - not at this time				
6 Appliance Outlet and	l Locati	on		11 BOILER AF	11 BOILER APPLIANCE SIZING (information required)				
Collar		Back		**Mechanical	room dra	wings WITHOUT DIN	MENSIONS WILL NOT BE ACCEPTE		
Flanged		Тор		Do you red	Do you require the SIZING for this system?				
ANSI		Other			YES				
Other					NO - not at this time				
SELECT YOUR POSITIVE	PRESS	URECHIMNEY	SYSTEM		S	ELECT GREASE	DUCT "0" CLEAR - CIX32		
OURA-PRO			Flue	Casing					
DA	S1	1" - air	304	304		Listed to UL-2221	(2-hour rating) and UL-1978		
DI	S1	1" - insulated	316	441		<b>SCL</b> Sir	ngle Wall Grease Duct		

SELECT	YOUR POSITIVE PRES	SURECHIMNEY	SELECT GREASE DUCT "0" CLEAR - CIX32			
DURA-P	PRO		Flue	Casing		
	DAS1	1" - air	304	304	Listed to UL	-2221 (2-hour rating) and UL-1978
	DIS1	1" - insulated	316	441	SCL	Single Wall Grease Duct
	DIS2	2" - insulated		Galvalume		
	DIS4	4" - insulated			CIX3Z	"0" Clear Grease Duct
СТ	Positive Pressure Liner		304	316	Flue	Casing
DIS	DIS Positive Pressure 2" insulated			304	304	304
			316	316		441
				Galvalume	316	Galvalume

## **DuraStack PRO Series and DIS Design and Quote Request Submittal Form**

This is an interactive PDF form / type in the shaded area



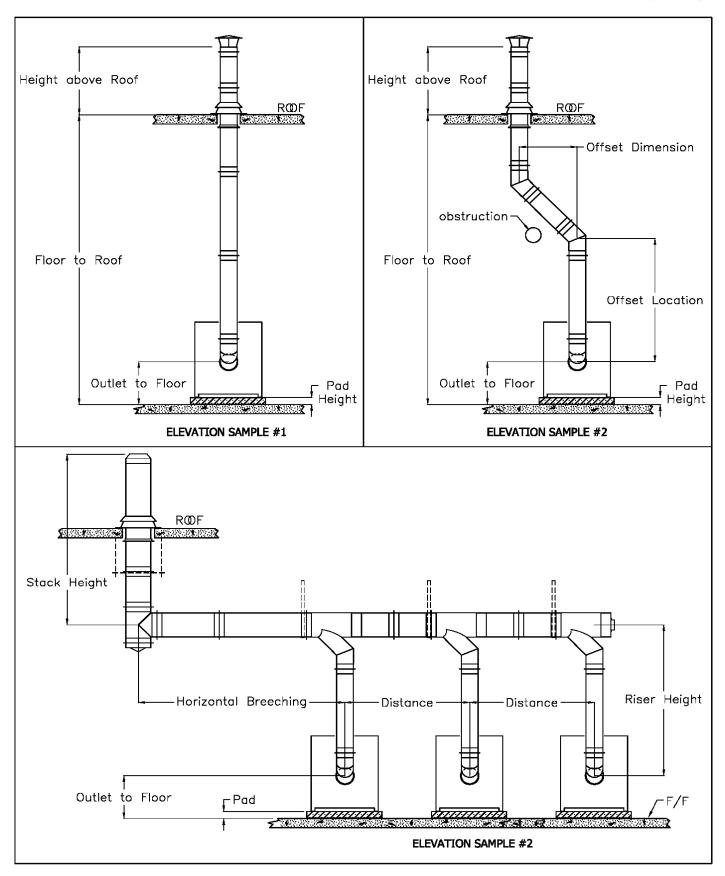

## **DuraStack PRO Series and DIS Design and Quote Request Submittal Form**

## This is an interactive PDF form / type in the shaded area



